

SONY

make.believe


Solid Installation Projector VPL-FH36

Key Features


- 5,200 lumens
- Native WUXGA (1,920 x 1,200) resolution
- Bright Era™ long lasting optics
- Flexible 1.6x manual zoom standard lens
- Vertical +60%, Horizontal +/-32% lens shift
- Advanced geometric correction
 - H/V keystone adjustment
 - 4 corners and 4 sides
- Edge blending
- Picture by picture function
- Network control and monitoring
- DICOM GSDF simulation gamma mode
- Synchronized lamp and filter maintenance cycle
- Rich interface terminals including DVI-D and HDMI
- Blend-in design
- Low power consumption

Dimensions (Front)

Unit: mm (inches)

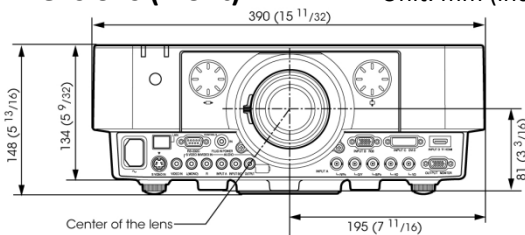

Dimensions (Bottom)

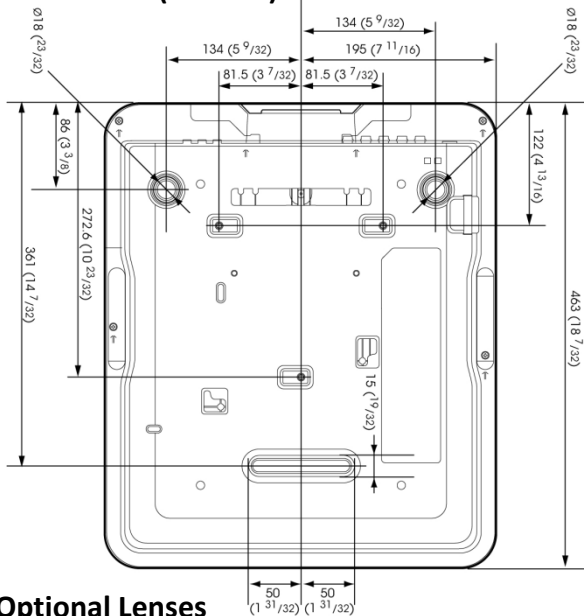

Optional Lenses

	VPLL-Z1024	VPLL-Z1032
Throw Ratio	2.34 to 3.19	3.18 to 4.84
Aperture	f/2.00 to 2.30	f/2.00 to 2.40
Lens Shift	Vertical : +60%/-0% Horizontal : +/- 32%	
Mass	Approx. 1.1kg / 2 lbs. 7oz.	
Lens Adapter	PK-F30LA1	

*1 The value is average.

*2 The figures are expected maintenance time and not guaranteed. They will depend on the environment or how the projector is used.

*3 Works as an audio switcher function. Output from a selected channel, not available in standby.

© 2012 Sony Corporation. All rights reserved. Reproduction in whole or in part without written permission is prohibited. Features and specifications are subject to change without notice. The values for mass and dimension are approximate. "SONY", "make.believe" and "BrightEra" are trademarks of Sony Corporation. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. All other trademarks are the property of their respective owners.

WUXGA/5,200lm

Optical		
Light Output / Color Light Output	5200 lumens (high mode) 3900 lumens (Std lamp mode)	
LCD Panels	0.76" x 3 BrightEra LCD Panel	
Panel Display Resolution	WUXGA (1920 x 1200 dots)	
Contrast Ratio	2,000:1 (Full white/full black)*1	
Light source	High-pressure mercury lamp 330 W type	
Lamp replacement time*2	2500H(High) / 3500H(Standard)	
Filter cleaning cycle*2	Max. 15000H Same time as the lamp replacement is recommended	
Projection Lens	Zoom / Focus	Approx. 1.6x manual zoom / Manual focus
	Lens Shift	Manual, Vertical +60%/-0% Horizontal +/- 32%
	Throw Ratio	1.39:1 to 2.23:1
Screen Size	40" to 600"	
Interface		
Computer and Video Input/Output	INPUT A	5BNC (RGB / Y Pb Pr) Audio : Stereo mini jack
	INPUT B	Mini D-sub 15-pin (RGB) Audio : Stereo mini jack (shared with INPUT C)
	INPUT C	DVI-D (HDCP support) Audio : Stereo mini jack (shared with INPUT B)
	INPUT D	HDMI (Digital RGB/Y Pb Pr, Digital Audio) (HDCP support)
	S VIDEO IN	Mini DIN-4pin Audio : Pin jack x2 (shared with VIDEO IN)
	VIDEO IN	Pin Jack Audio : Pin jack x2 (shared with S VIDEO IN)
	Monitor OUT	Mini D-sub 15-pin (from INPUT A and B)
	Audio OUT	Stereo mini jack (variable out)*3
Control Signal Input/Output	RS-232C	D-sub 9 pin
	LAN	RJ-45, 10BASE-T/100BASE-TX
	Control S	Stereo mini jack, Plug in power DC5V
General		
Scanning Frequency	H: 15 to 92kHz, V: 48 to 92Hz	
Display Resolution	Computer signal input	Maximum display resolution : 1920x1200 dots
	Video signal input	NTSC, PAL, SECAM, 480/60i, 576/50i, 480/60p, 576/50p, 720/60p, 720/50p, 1080/60i, 1080/50i, 1080/60p, 1080/50p, 1080/24p
Color System	NTSC3.58, PAL, SECAM, NTSC4.43, PAL-M, PAL-N, PAL60	
Power Requirements	AC 100V to 240V, 4.6A to 1.9A, 50Hz/60Hz	
Power Consumption	460W (AC 100V-120V) 440W (AC 220V-240V)	
Standby Mode Power Consumption	9.2 W (Std) / 0.15 W (Low) (AC 100V-120V) 10.4 W (Std) / 0.3W (Low) (AC 220V-240V)	
Dimensions (W x H x D)	390 x 148 x 477 mm 15 11/32 x 5 13/16 x 18 25/32"	
Mass	8.3kg / 18 lb 5 oz	
Optional Accessories		
Replacement Lamp	LMP-F331	
Projection Lens Adapter	PK-F30LA1	
Replacement Filter	4-172-386-01 (Top) / 4-172-387-01 (Bottom) (filters are cleanable)	
Replacement Remote	1-489-092-11 (RM-PJ19)	

Connector Panels

